


# TECHNICAL SPECIFICATIONS CRUSHER C4

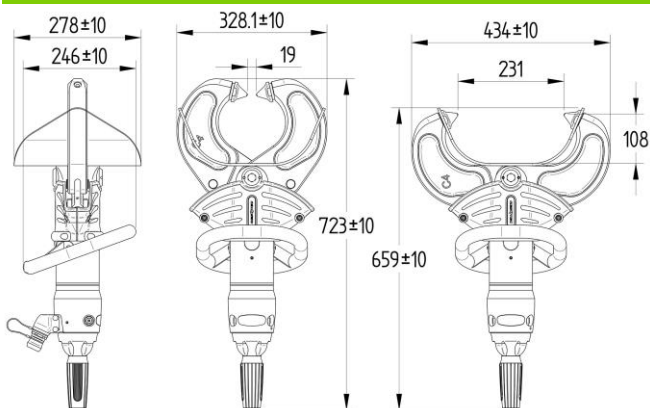

## CONCRETE CRUSHER C4

NEO1 

HP/FF 

Nominal pressure	UltimatePressure™ 350 Bar	UltimatePressure™ 350 Bar
Tailhose safety factor	-	8:1 (2800 bar)
Dimensions (L x W x H)	723 x 328 x 278 mm	723 x 328 x 278 mm
Operational weight	13.6 kg	14.9 kg
Max. crushing opening / material thickness	231 mm	231 mm
Reach	108 mm	108 mm
Max. crushing force	65.8 kN / 6.7 ton	65.8 kN / 6.7 ton
Min. crushing force	52.7 kN / 5.4 ton	52.7 kN / 5.4 ton
EN 13204	Fullfills safety requirements	Fullfills safety requirements
NFPA 1936	Fullfills design requirements	Fullfills design requirements

## ACCESSORIES

LED light add-on 9500.1000



**PRESSURE™  
 ULTIMATE**

**neo1**  
 TECHNOLOGY

**ADVANCED**  
 BLADE DESIGN

Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



**RESQTEC Zumro B.V.**  
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

**T** +31 (0)252 419002 **F** +31 (0)252 411794  
**E** info@resqtec.com **W** www.resqtec.com

**RESQTEC®**